

地址: 上海市青浦区金泽镇沪青平公路 9565 号
电话: 021-39261010
传真: 021-59261010
邮编: 201718
E-mail: shmd999@163.com
网址: www.shmdchina.com

Add: No. 9565 Huqingping Road Jinze Town Qingpu Shanghai
Tel: +86-21-39261010
Fax: +86-21-59261010
Zip Code: 201718
E-mail: shmd999@163.com
Website: //www.shmdchina.com

上海中菱电梯有限公司阿塞拜疆分公司

ABSHERON_LIFT-SERVICE LLC

E-mail: absheron_lift@mail.ru

AZERLIFT SERVICE LLC

AZERLIFT SERVICE LTD

E-mail: azerliftservice@mail.ru

Add: AZ 5011 Sumgait City, estates 47, building 11, apartment 25

Tel: +994 55 289 19 39

+994 70 289 19 39

+994 50 280 30 82

+994 055 267 90 00

+994 12 585 19 29 (city phone number)

TAX ID: 2904455531

免费服务热线: **800 820 1930**

Service Hotline:

400 620 1930



MD-SG

载货电梯

Freight Elevator

如有变更恕不另行通知 / The picture is drawn by the computer and it may be slightly different with the actual.
2020 年第一版




About us

关于我们



2010年上海世博会民企联合馆

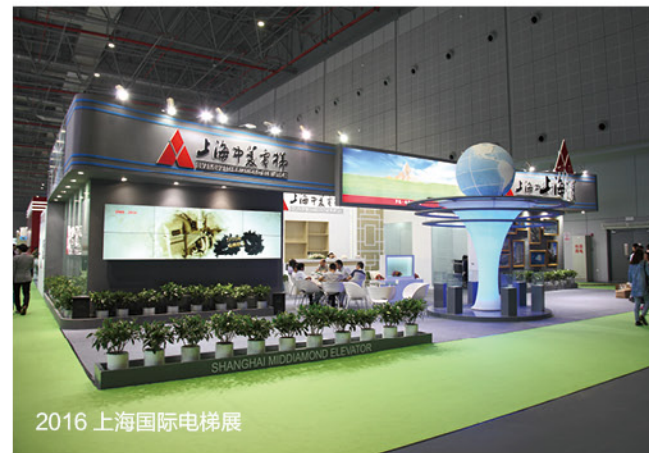

2016 上海国际电梯展

上海中菱电梯成立于1989年，是集设计、制造、销售、安装和维保于一体的现代化专业电梯企业。公司拥有国家质检总局颁发的电梯制造、安装、改造和维修双A级资质，公司产品涵盖乘客电梯、医用电梯、观光电梯、住宅电梯、载货电梯、自动扶梯、自动人行道等。凭借三十年电梯制造经验，丰富的产品品类可满足客户多样化的需求，业务范围涉及全国各省、地市，更远销东南亚、中东、非洲等地，并与多家企事业单位建立了长期业务合作关系。

30年栉风沐雨，作为2010年上海世博会的供应商，上海中菱电梯传承上海工业精神，专注电梯服务三十年，贯彻中国智造理念，将信息化管理与物联网技术运用到了生产、管理与服务之中，实现信息化与智能化的制造产业生态，力争全面了解客户需求，服务网点遍布全国各地，为客户和用户提供更全面而卓越的建筑交通服务。

Founded in the year of 1989, Shanghai Middiamond Elevator is a modern professional elevator enterprise integrating design, manufacturing, sales and maintenance. The company owns the double A qualification of elevator manufacturing, installation, modification and maintenance with its business scope of passenger elevator, hospital elevator, sightseeing elevator, residential elevator, freight elevator, escalator, automatic sidewalk, etc. Relying on its 30-year elevator manufacturing experience, its rich product varieties can meet the customers' diversified demands and its business scope is involved various provinces and cities throughout the country. Its products are even exported to the Southeast Asia, the Middle East, Africa, etc. Furthermore, it has set up long term cooperation with many enterprises.

Dedicated to elevator service for 30 years, Shanghai Middiamond Elevator applies the concept of intelligent manufacturing in China, information management and Internet of things to production, management and service while inheriting the spirit of Shanghai spirit as the supplier of Shanghai Expo in 2010, thus achieving information and intelligent manufacturing industrial chain and striving to know customers' demand. With service networks are all over the country, it provides overall and excellent architecture traffic service for customers and users.




产品科技

Product technology

永磁同步无齿轮曳引机

选用稀土材料，将同轴传动技术、数字变频技术和群组电脑组合控制技术充分融合，高效节能，运行成本最小，热量散失低，工作效率极高，与一般传统技术相比，可节省能源 40% 之多。而且无齿轮曳引机无需更换油脂，无油渍污染，低噪音设计，为您营造宁静的乘坐空间。

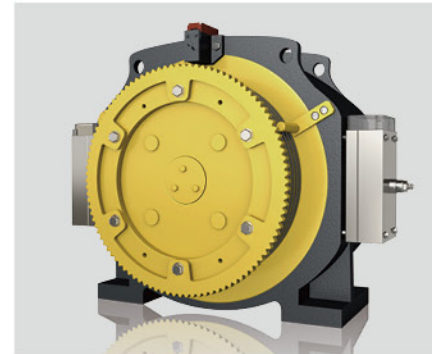

The permanent magnet synchronous and gearless traction

It chooses the rare earth materials to fully merge the coaxial drive technology, the numeric variable frequency technology, the group-computer combined control technology with the efficient energy-saving, minimum travel cost, low heat dissipation, extremely high work efficiency. Compared with the common traditional techniques, it can save more than 40% of the energy. And the gearless traction machine needs no renewal of the grease without any oil pollution. The low noise design produces a peaceful riding space for you.

有齿轮曳引机

技术成熟，可靠性高
持久耐用
运行平稳
坚固耐用

A gear traction machine

Mature technology, high reliability
Fine durability
Smooth running
Firm and durable



极富人性化的操纵

具备全自动集选功能，可实现有 / 无司机操纵，另轿内操纵箱上特设“关门延时”按钮，其关门延时时间可按需要在现场灵活调整，其人性化的设置，更让您在装卸货物时从容自如。



The extremely humane operation

It is equipped with fully automatic collective selective function. It can fulfill operation with driver/without drive. The operation box specially and additionally sets "door-shut delay" button in the car operation box. Door-shut delay time can be flexibly adjusted at site according to the requirements. You feel more at ease at loading and unloading the goods out of its humane setting.

高强度材料，抗衰耐用

上海中菱载货电梯不仅采用高强度型材制作轿厢，还对轿厢底盘进行特殊加强设计，使得自身产品更加经久耐用，不易老化。

The durable and anti-ageing high-strength materials

Shanghai Middiamond freight elevator not only applies high-intensity section materials to manufacture the cars, but also implements special reinforcement design to the car platform. It brings about the more durable and anti-ageing products.

高效矢量电梯专用变频器

应用了高性能电流矢量控制和绝对值编码器，实现高性能无传感器的其中转矩补偿功能，使电梯乘坐更加舒适；电梯曳引机可进行停止型学习，电梯的维护更加简单方便；自动转矩提升功能可以轻松应对电梯的各种负载。

High effect elevator vector inverter


Application of high performance current vector control and absolute encoders, high-performance sensorless torque compensation function which make the elevator ride more comfortable; elevator traction machine can be stopped based learning, more simple and convenient elevator maintenance; automatic transfer torque boost function can easily cope with a variety of load lift.

现实平稳舒适

采用上海中菱载货电梯专用变频技术减少电梯运行中振动、摇晃。加减速平稳，实现搭乘平稳舒适。

Realizing stability and comfort

Employing Shanghai Middiamond freight elevator's exclusive VVVF technology to reduce the vibration and shaking during the movement of the elevator, achieving stable and comfortable experience for the passengers.

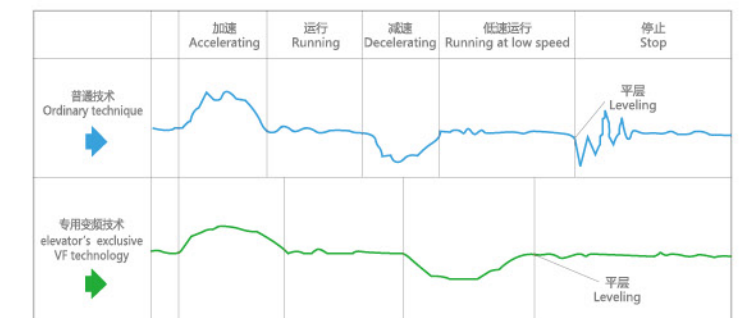


载货电梯


上海中菱载货电梯利用微机控制技术，采用高强度的型材设计制造的轿厢，可在各种恶劣环境下进行货物运输的工作。安全可靠、结构强度高、经久耐用、运行平稳、开门距大、性价比高等优点使上海中菱货梯成为工厂、仓储、百货商城、物业中心等单位运输货物的理想选择。

Freight elevator


Shanghai Middiamond freight elevators apply micro-computer control technology. It uses high intensity cars that have been designed and manufactured by section materials. It can transport the freight under various awful conditions. Shanghai Middiamond freight elevator is your ideal choice in the factory, warehouse, department store, shopping center, housing property management center etc. because of its safe; durable and reliable properties, high structural strength, smooth operation, large door opening distance, high cost performance and so on.




旁开双折门
Two panel sliding door



中分双折门
Center-opening & double-folded



单通门
Single way door



双通门
Double way door

大宽度开门, 大自由进出

为方便大体积货物的自由进出，上海中菱载货电梯系列产品均采用多折式轿厢结构，让轿门打开可达到最大宽度。

Large width door opening, free entry/exit

For the convenience of free entry/exit of large bulk freight, Shanghai Middiamond freight elevator series apply multi-folded car structures. It can reach maximum width while opening the car door.

多种开门方式

为了满足用户的不同进出要求，上海中菱载货电梯有旁开双折门、中分双折门、单通门、以及双通门四种开门方式供选择，与工厂、仓储、百货商场、物业中心等建筑物结构灵活匹配。

The multiple door opening modes

In order to satisfy different entry/exit requirements from vast users, Shanghai Middiamond freight elevator offers four door opening modes of side opening, center opening double-folded door, one-way door opening, opposite door opening. It can flexibly match with the factory, warehouse, department store, shopping center, housing property management center etc.

无机房载货电梯

上海中菱无机房货梯，深谙节能降耗理念，不仅节约建筑面积，且提高设计自由度，充分体现绿色低碳。与同等载重量级别的带机房货梯相比，节约电能 25%，节约建筑面积 10%。

Machine roomless freight elevator

Shanghai Middiamond machine roomless freight elevator knows very well of the energy-saving and loss-reducing ideas. It not only saves the building area, but also increases design freedom extent, It gives full play of green low-carbon. Compared with same load level freight elevator with machine room, it saves 25% of the electric energy and 10% of the building area.



轻松融入建筑

上海中菱无机房载货电梯只需井道，无需机房，能为建筑设计带来更多的自由。

Easily merges with vast constructions

Shanghai Middiamond machine roomless freight elevator only needs a well without machine room. It brings about more design freedom to vast buildings.

减少 **40%** 空间占有率
It reduces 40% of the space occupation rate.

节省 **25%** 电梯设备总面积
It saves 25% of the total area of the elevator equipments.

降低近 **33%** 能源消耗率
It reduces nearly 33% of the energy consumption rate.

应用场合广泛

与传统有机房载货电梯相比，上海中菱无机房载货电梯应用场合广泛，更适用于现代社会的垂直交通领域。

Extensive application occasions

Compared with the traditional freight elevator with machine room, Shanghai Middiamond machine roomless freight elevator has the more extensive application occasions. It better suits the vertical transport field in modern societies.

汽车电梯

继承德国先进的汽车升降技术,根据汽车产品的特殊性而专门设计,解决了传统汽车电梯噪音大、不稳定的技术障碍,凭借美观的外型、简便的操作方式,和占地空间小、空间利用率高、适用范围广的优点,成为新一代汽车电梯的典范。

Automobile elevator

It inherits the advanced German car lifting technology. It has been specially designed according to particularity of car products. It solves the unstable technical barriers of large noise to traditional car elevators. It is backed by the attractive outline, convenient operation mode, little sharing space, high utilization rate of the space, wide application range. It becomes a model example of new generation car elevator. Meanwhile it is convenient for operators inside and outside the elevator car.

安全导向装置

轿内地面设有安全导向装置,保证了电梯及汽车的安全。

Safety guide device

Safety guide device sets in the car ground to ensure fine security of both the cars and the elevators.

独特显示系统

专门的电路控制及显示系统,既方便轿内司机,又方便轿外候梯的司机。

Special display system

Special circuit control and display system is convenient for the drivers inside/outside the car.



杂物货梯

采用工业电脑 (PLC) 或微机控制,品种规格齐全,结构新颖,制造精良,具有安全可靠、运行平稳、操作方便,轿厢和厅门采用优质发纹不锈钢板制作,豪华美观,广泛适用于宾馆、饭店等,深受广大用户欢迎。

Debris elevator

Using industrial computer (PLC) or computer control, complete specifications, novel structure, fine workmanship, with safe, reliable, stable, easy to operate the car and landing doors made of high quality stainless steel plate production lines, luxury and beauty, widely used in hotels, restaurants and other units, is popular among customers.




优越性能

- 电锁功能: 基站呼梯盒配备电锁,用于启动和关闭电梯的控制回路;
- 运行故障保护功能: 当超出正常运行时间 10 秒内,电梯停止运行,以防烧坏电机;
- 故障自显示功能: 将诊断后的故障以代码形式显示;
- 故障自诊断功能: 能够诊断故障现象及原因;
- 自恢复保险功能: 控制信号回路如果短路保险自动断开,当故障消除后保险自动接通;
- 接触器粘连保护功能: 如接触器线圈断电后接点未能断开时,防止再次运行以保障安全;
- 呼梯应答功能: 按下呼梯按钮,被呼梯层按钮数字指示灯亮,到站后撤销记忆指示灯灭;
- 蜂鸣提示功能: 具有到站蜂鸣提示功能;
- 开关门状态指示功能: 电梯运行到站后开启层门,数码显示开门状态并提示此梯在本层使用;
- 运行方向显示功能: 运行方向由上下行发光箭头显示;
- 楼层显示功能: 电梯运行所到楼层由数码显示;

The advantageous performances

- Electric lock function: call the base station is equipped with electric locks ladder box, used to start and shut down the elevator control circuit;
- Run fault protection function: When outside the normal run time of 10 seconds, the elevator stopped, to prevent burn out the motor;
- Fault self-display: the diagnosis of faults in code display;
- Self-diagnostic capabilities: the ability to diagnose and Causes;
- Restoring self-insurance function: if the control signal circuit short-circuit the insurance automatically disconnect when the failure to eliminate auto-connect after the insurance;
- Contactor adhesion protection: If contactor coil power disconnected contacts unable to prevent the re-run to ensure safety;
- Call ladder response function: Press the call elevator button, the call number elevator floor button light, light off the station after the revocation of memory;
- Beeper function: with the arrival Beeper function;
- Door switch status indicator: level elevator door open after running the station, digital display and prompts the ladder open state in this layer;
- Running direction of the display: the direction of the arrow up and down the line-emitting display;
- Floor display: run to the elevator floor by the digital display;

轿厢装潢 Car decoration

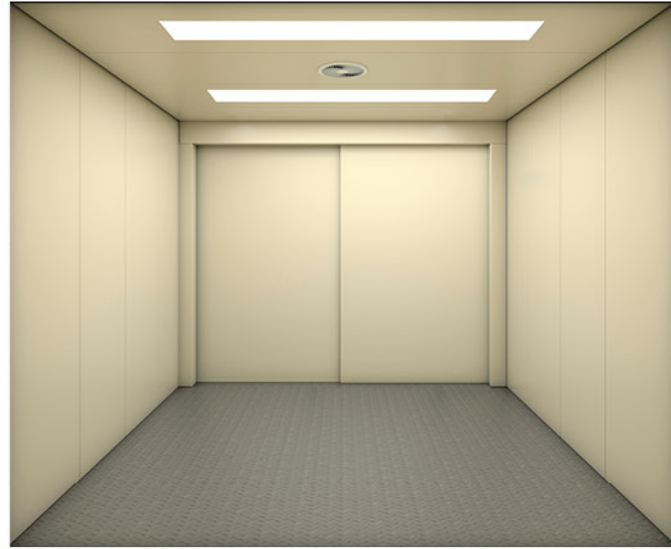

MD-H70S

双折门

- 轿壁:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 前壁板:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 护脚板:** (标准型) 烤漆钢板
(选配型) 镀锌护脚板 / 发纹不锈钢板
- 轿厢地板:** (标准型) 花纹钢板
(选配型) 耐用橡胶地板
- 地坎:** (标准型) 硬质铝型材
(选配型) 铸铁
- Car wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Front wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Food board: (std.)Prepainted steel sheet
(opt.)Foot protection board/Hairlined stainless steel sheet
- Car floor: (std.)Pattened steel sheet
(opt.)Durable rubber floor
- Sill: (std.)Hard aluminum profile
(opt.)Cast iron

MD-Q70S

双折门

- 轿壁:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 前壁板:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 护脚板:** (标准型) 烤漆钢板
(选配型) 镀锌护脚板 / 发纹不锈钢板
- 轿厢地板:** (标准型) 花纹钢板
(选配型) 耐用橡胶地板
- 地坎:** (标准型) 铸铁
(选配型) A3 轻质型材
- Car wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Front wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Food board: (std.)Prepainted steel sheet
(opt.)Foot protection board/Hairlined stainless steel sheet
- Car floor: (std.)Pattened steel sheet
(opt.)Durable rubber floor
- Sill: (std.)Cast iron
(opt.)A3 shaped light material



MD-H80S

中分双折门

- 轿壁:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 前壁板:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 护脚板:** (标准型) 烤漆钢板
(选配型) 镀锌护脚板 / 发纹不锈钢板
- 轿厢地板:** (标准型) 花纹钢板
(选配型) 耐用橡胶地板
- 地坎:** (标准型) 硬质铝型材
(选配型) 铸铁
- Car wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Front wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Food board: (std.)Prepainted steel sheet
(opt.)Foot protection board/Hairlined stainless steel sheet
- Car floor: (std.)Pattened steel sheet
(opt.)Durable rubber floor
- Sill: (std.)Hard aluminum profile
(opt.)Cast iron



MD-Q80S

中分双折门

- 轿壁:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 前壁板:** (标准型) 烤漆钢板 颜色自行选择
(选配型) 发纹不锈钢板
- 护脚板:** (标准型) 烤漆钢板
(选配型) 镀锌护脚板 / 发纹不锈钢板
- 轿厢地板:** (标准型) 花纹钢板
(选配型) 耐用橡胶地板
- 地坎:** (标准型) 硬质铝型材
(选配型) 铸铁
- Car wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Front wall: (std.)Prepainted steel sheet Various color for option
(opt.)hairlined stainless steel sheet
- Food board: (std.)Prepainted steel sheet
(opt.)Foot protection board/Hairlined stainless steel sheet
- Car floor: (std.)Pattened steel sheet
(opt.)Durable rubber floor
- Sill: (std.)Hard aluminum profile
(opt.)Cast iron



层门和门套

Landing door and jamb

MD-E102 标准门套
MD-E102 standard jamb



双折门

门套	烤漆钢板
标准型	发纹不锈钢板
选配型	镜面不锈钢
层门	烤漆钢板
标准型	发纹不锈钢板
选配型	蚀刻不锈钢板
地坎	硬质铝型材
标准型	铸铁
Double-folded door	
Door Frame	Prepainted steel sheet
Standard:	Segment stainless steel hairline
Seletive assembled:	Stainless steel mirror
Doors	Prepainted steel sheet
Standard:	Segment stainless steel hairline
Seletive assembled:	Stainless steel etching
Sill	Molded hard aluminum
Standard:	Cast iron
Seletive assembled:	

MD-E302 标准门套
MD-E302 Standard Door Frame



中分双折门

门套	烤漆钢板
标准型	发纹不锈钢板
选配型	镜面不锈钢
层门	烤漆钢板
标准型	发纹不锈钢板
选配型	蚀刻不锈钢板
地坎	硬质铝型材
标准型	铸铁
Double-folded door	
Door Frame	Prepainted steel sheet
Standard:	Segment stainless steel hairline
Seletive assembled:	Stainless steel mirror
Doors	Prepainted steel sheet
Standard:	Segment stainless steel hairline
Seletive assembled:	Stainless steel etching
Sill	Molded hard aluminum
Standard:	Cast iron
Seletive assembled:	

图片系电脑绘制，可能与实际图有不同。
The pictures are plotted by computer and are likely somewhat different from the actual products.

操纵箱和外呼

Operation box and external calling panel

操纵盘和按钮箱 / Operation Panel and Control Box

标准型 Standard

面板	发纹不锈钢板
显示板	烟灰色塑料板
显示方式	数码管显示
标准型	点阵式显示
选配型	不锈钢板
按钮	发光二极管
应答灯	(灯亮时为红色)
Facplate	Stainless steel hairline
Display Panel	Smoky grey plastic
Display Mode	LED display
Standard	Dot display
Seletive assembled	Stainless steel sheet
Button	LED red when illuminated
Response Light	

选配型 Optional

面板	发纹不锈钢板
显示板	烟灰色塑料板
显示方式	点阵式显示 (LED)
标准型	
召唤按钮	微动按钮 / 灰色塑料板 (不锈钢)
应答灯	发光二极管 (灯亮时为红色)
Faceplate	Stainless steel hairline
Display Panel	Smoky grey plastic
Display Mode	Dot display (LED)
Std.	
Call Button	Microstroke button in grey plast
Response Light	LED red when illuminated




选配按钮 / Optional buttons



装潢材质与色标 / Materials and colors

烤漆钢板 (轿壁、轿门、层门、门套)
Paint-baking steel sheet (Car Walls and Car Door, Landing Door, Door Frame)

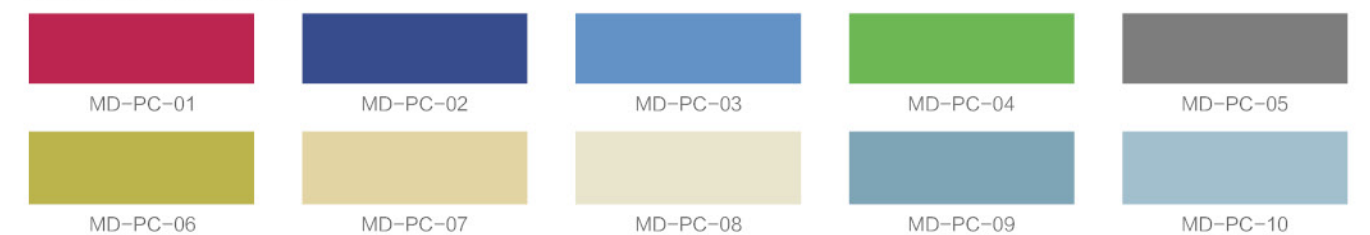

图片系电脑绘制，可能与实际图有不同。
The pictures are plotted by computer and are likely somewhat different from the actual products.

载货电梯功能表

Freight elevator feature table

标准功能 Standard functions

代号 code	名称 name	项目 item	规格内容 content
AS	司机服务 driver service	载重量 (kg) load capacity(kg)	5000kg 3000kg 2000kg 1000kg 630kg
AST	防止失速内部计时器保护 anti-aerodynamic stall internal timer protection	速度 speed (m/s)	0.25 0.5 1.0
CCC	反向时解除轿内召唤 cancellation reversal car call	最大层数站 maximum number of stops	16
DTC	关门时间控制 time control of door close	最大提升高度 maximum travel (mm)	63m
ECL-C	轿内应急照明: 自动充电 emergency lighting in car: automatically re-charge	控制方式 control mode	交流双速, 微机控制 alternating current two speed, microcomputer control
EDC	即时关门 expediting of door-close	操作方式 operation mode	IC-2BC(单梯信号) IC-2BC(single car signal)
EMB	警铃 alarm	门系统 door system	直流门机 direct current door machine
HAND	检修运行 inspection running	开门方式 door opening	2CO(双折中分) 或 2S(双折) centre opening two folding or two folding
HCR	最高层自动反向 automatically reverse on top floor	曳引机位置 traction machine position	井道上部 upper of shaft-well
HOS	层站运行控制开门 door opening control when running	供电电源 power supply	动力 380V 50Hz, 照明 220V 50Hz power supply 380V 50Hz, lighting 220V 50Hz
LCR	最低层自动反向 automatically reverse on ground floor	法规基准 regulation benchmark	GB7588-2003
NXL	换层停靠 docking floor changing		
RDC	重复关门 repeat door closing	性能标准 performance index	
ROHB	本层开门 reopen by hall button	平层准确度 leveling accuracy	$\leq \pm 15\text{mm}$
SDE	安全触板 SDE 和 AMS 两者必选一 safety door edge SDE and AMS must choose one	运行振动 (O-P) run vibration (O-P)	a 水平 $\leq 15\text{cm/s}^2$ b 垂直 $\leq 25\text{cm/s}^2$ a horizontal $\leq 15\text{cm/s}^2$ b vertical $\leq 25\text{cm/s}^2$
SFL	安全停靠 safety docking		运行时层站 floor when running

标准功能 Standard functions

代号 code	名称 name	项目 item	规格内容 content
SO	停止开门 stop and door open	运行中轿厢内噪声 noise in car when running	$\leq 55\text{dB(A)}$
CFO-A	风扇自动停止 fan automatically stop	开关门过程噪声 noise in door open-and-close process	$\leq 65\text{dB(A)}$
CLO-A	照明自动停止 light automatically off	机房噪声 machine room noise	$\leq 80\text{dB(A)}$
DOB	开门按钮操作 door-open button operation	启动频度 start frequency	180 次 / 小时 180 times/hour
DCB	关门按钮操作 door-close button operation		
RBNR	运行时马达不转保护 motor-no turn when running protection		
CNOCP	接触器不释放不吸合保护 contactor non-releasing non pick-up protection		

选择功能 Optional functions

代号 code	名称 name
ABP	满员自动直达 full-load by pass
ARL	自动在平层 automatic re-leveling
FE	消防应急操作 fireman's emergency operation
FER	消防应急返回 fireman's emergency backing
GC	轿厢上下到站预报钟 car upper/down approaching gong
MFP	主层返回 back to main floor


代号 code	名称 name
OLHL	轿内超载显示 overload display in car
ITP	内部通话装置 (6V 电源) internal call device(6V power)
OLH	超载报警 overload holding stop
AMS	光幕门保护装置 door sensor protection device
WOA	无司机自动运行 automatic running w/o driver

载货电梯土建图


Construction dimension of freight elevator

MD 标准有机房载货电梯土建图

MD standard machine room freight elevator construction dimension

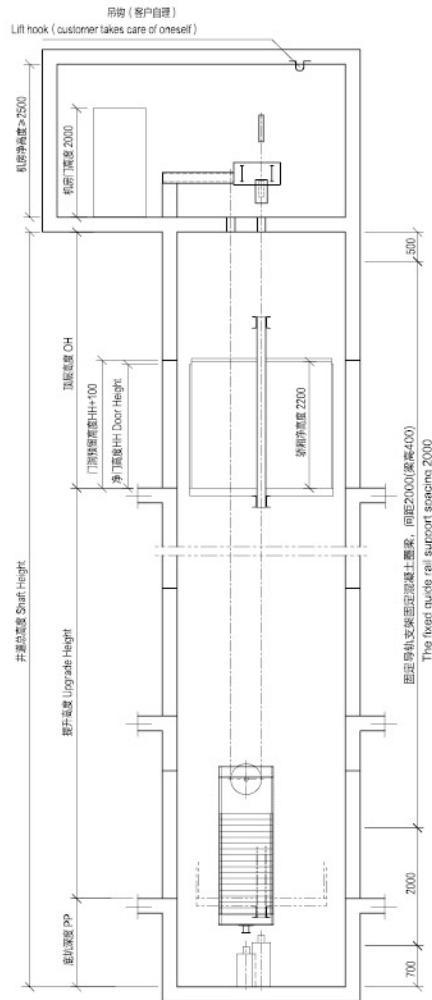


井道立面图
Shaft section plan




井道平面图
Shaft floor-plan

MD 标准无机房载货电梯土建图

MD standard machine roomless freight elevator construction dimension

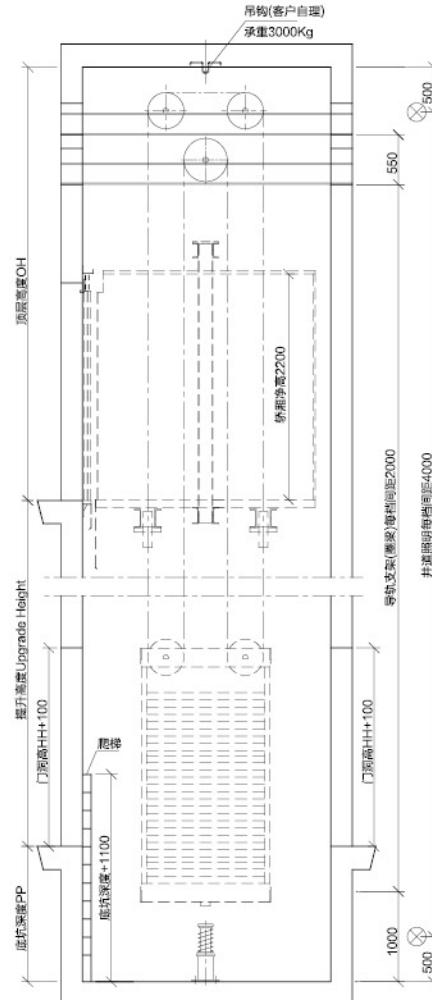

井道立面图
Shaft section plan



井道平面图
Shaft floor-plan

MD 标准有机房载货电梯系列 MD standard machine room freight elevator

速度 Speed (m/s)	载重量 Weight capacity (kg)	轿厢内尺寸 Inner car dimension	轿厢外尺寸 Outer car dimension	井道尺寸 Shaft dimension	轿厢 (单开门/ 贯通门)	开门形式 Opening	开门宽度 Opening width	开门高度 Door net height	轿厢 净高度 car height	顶层高度 (最小) Headroom height	底坑深 Pit depth
		宽 x 深 AAxBB	宽 x 深 ASxBS	宽 x 深 AHxBH		旁开双折/ 中分双折	JJ	HH		OH	PP
0.5	1000	1500x1600	1560x1726	2400x2100	单开门	旁开双折	1100	2100	2200	4200	1500
0.5	1000	1300x1800	1360x1992	2200x2320	贯通门	旁开双折	1100	2100	2200	4200	1500
0.5	1000	1500x1600	1560x1726	2480x2100	单开门	中分双折	1200	2100	2200	4200	1500
0.5	1000	1300x1800	1360x1992	2400x2320	贯通门	中分双折	1200	2100	2200	4200	1500
0.5	1600	1840x1930	1900x2056	2750x2350	单开门	旁开双折	1400	2100	2200	4200	1500
0.5	1600	1700x2100	1760x2292	2650x2620	贯通门	旁开双折	1400	2100	2200	4200	1500
0.5	1600	1840x1930	1900x2056	2800x2350	单开门	中分双折	1400	2100	2200	4200	1500
0.5	2000	1700x2100	1760x2292	2800x2620	贯通门	中分双折	1400	2100	2200	4200	1500
0.5	2000	1940x2174	2000x2300	2900x2650	单开门	旁开双折	1500	2100	2200	4200	1500
0.5	2000	1840x2308	1900x2500	2800x2820	贯通门	旁开双折	1500	2100	2200	4200	1500
0.5	2000	1940x2174	2000x2300	3000x2650	单开门	中分双折	1500	2100	2200	4200	1500
0.5	2000	1840x2308	1900x2500	2850x2820	贯通门	中分双折	1500	2100	2200	4200	1500
0.5	3000	2240x2580	2300x2706	3300x3050	单开门	旁开双折	1800	2100	2200	4200	1500
0.5	3000	2240x2580	2300x2772	3300x3100	贯通门	旁开双折	1800	2100	2200	4200	1500
0.5	3000	2440x2400	2500x2526	3550x2850	单开门	中分双折	1800	2100	2200	4200	1500
0.5	3000	2100x2750	2160x2942	3400x3270	贯通门	中分双折	1800	2100	2200	4200	1500
0.25~1.0	3200	2100x2750	2160x2876	3400x3450	单开门	中分双折	1800	2100	2200	4200	1500
0.5	5000	2500x3600	2560x3726	4100x4100	单开门	中分双折	2400	2300	2400	5000	1600
0.5	5000	2500x3600	2560x3792	4100x4120	贯通门	中分双折	2400	2300	2400	5000	1600

MD 标准无机房载货电梯系列 MD standard machine roomless freight elevator

速度 Speed (m/s)	载重量 Weight capacity (kg)	轿厢内尺寸 Inner car dimension	轿厢外尺寸 Outer car dimension	井道尺寸 Shaft dimension	轿厢 (单开门/ 贯通门)	开门形式 Opening	开门宽度 Opening width	开门高度 Door net height	轿厢 净高度 car height	顶层高度 (最小) Headroom height	底坑深 Pit depth
		宽 x 深 AAxBB	宽 x 深 ASxBS	宽 x 深 AHxBH		旁开双折/ 中分双折	JJ	HH		OH	PP
0.5	2000	1840x2260	1900x2386	3000x2750	单开门	中分双折	1500	2100	2200	4800	1500
0.5	3000	1750x2400	1810x2592	2850x2950	贯通门	旁开双折	1500	2100	2200	4800	1500

全心全意全时刻
我们伴您左右

Wholeheartedly,
We will accompany you all the time



专业团队

上海中菱电梯拥有强大的安装及售后维保团队，我们技术熟练的维保人员分布在全国各地的分公司及站点，通过不断的技术培训，维保人员能够为所有旗下产品提供专业的预防性保养及维修服务。

Professional team

Shanghai Middiamond Elevator has a strong installation and after-sales maintenance team. Our skilled maintenance personnel are distributed in branches and sites across the country. Through continuous technical training, maintenance personnel can provide professional preventive measures for all its products. Maintenance and repair services.



快速响应

我们专业的维修技术人员，响应迅速，第一时间赶赴现场，倾力为您提供长效解决方案。

Quick response

Our professional maintenance technicians responded quickly and rushed to the scene as soon as possible to provide you with long-term solutions.




定制保养

作为服务型企业，上海中菱电梯提供最完善灵活的服务。我们将根据您的实际需求量身定制服务解决方案，科学计算最经济妥善的解决方案。

Custom maintenance

As a service-oriented enterprise, Shanghai Middiamond Elevator provides the most complete and flexible service. We will tailor the service solution according to your actual needs, and calculate the most economical and sound solution scientifically.

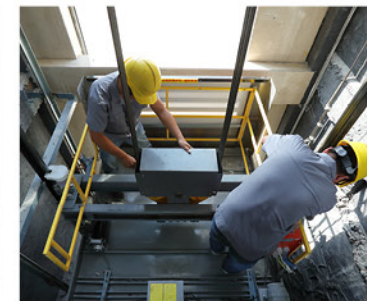

全国热线

开通 24 小时全国免费热线，耐心解决您的任何问题，全心全意全天候为您保驾护航。
全国服务热线：800 820 1930 400 620 1930

National Hotline

Open a 24-hour nationwide toll-free hotline, patiently solve any problems you have, and wholeheartedly escort you 24/7.
National Service Hotline: 800 820 1930 400 620 1930